


12MM METAL WATERPROOF PB

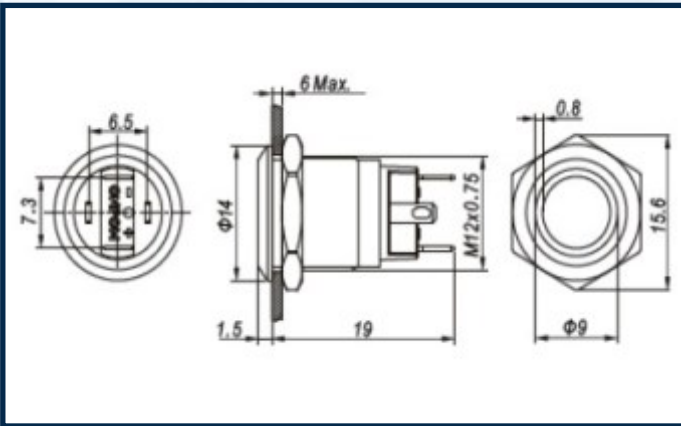

P/N: SFN-2348-S000

MECHANICAL SPECIFICATIONS:

Travel: 1.5 mm.

Operating cycles: 200,000 cycles min.

Torque: 1.5N max.

Operation type: Momentary.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -25/+55 °C.

Water & Dust protection: IP-65.

ELECTRICAL SPECIFICATIONS:

Contact form: N.O

Maximum rating: 2A / 36VDC.

Contact resistance: 50m Ohm or less.

Dielectric strength: 1,500 VAC rms.

Led light: Bi-color 12V Orange/Green

MATERIALS:

Housing: Stainless steel.

Terminals & Contacts: silver plated.

Base material: PA.

Options & information:

Customized harness

Other LED colors

Other LED voltage.

