


## ULTRA SMALL RF CABLE ASSEMBLY

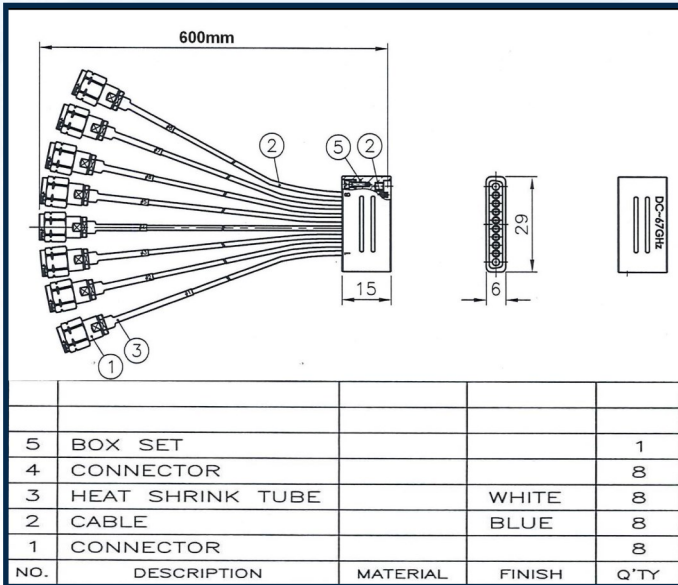

**P/N: CMR-2860-S000**

### MECHANICAL SPECIFICATIONS:

Box set: SMPM, 8 channels.  
 Connector: 1.85 plug.  
 Cable OD: 1.42mm  
 Min. dynamic bend radius: 10mm

### ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -65/+125 °C

### RF SPECIFICATIONS:

Impedance: 50 Ω  
 Frequency range: DC 67Ghz  
 Return loss: -15 Db Max.  
 Matched Pair Cables delay time <0.5ps

### ELECTRICAL SPECIFICATIONS:

Voltage: 80Vrms (AC, 60Sec test)

### Options & information:

Connector with 2.92mm, can used up to 40GHz,  
 Connector with 2.4mm, can be used up to 50GHz.