


WATERPROOF KEY SWITCH

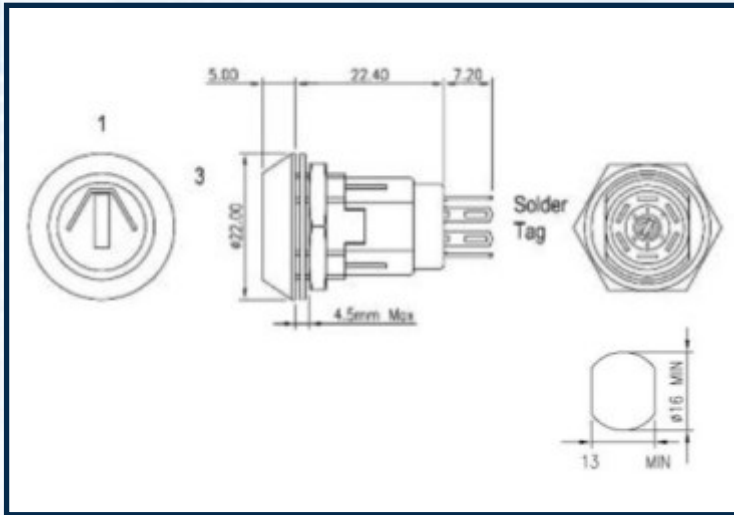

P/N: SAO-2525-S000

MECHANICAL SPECIFICATIONS:

Max. panel thickness 3.5mm.

Lock type: : 5 Disc.

Operation cycles: 10,000 cycles min.

2 positions, Indexing 60°.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -20/+65 °C

Water & Dust protection: IP66/IP67

ELECTRICAL SPECIFICATIONS:

Contact form: 2PDT.

Maximum rating: 1A/24VDC.

Contact resistance: 20m Ohm.

Insulation resistance: 1000MΩ @ 500Vdc.

MATERIALS:

Lock housing: Zinc alloy Chrome plated.

Actuator: Stainless Steel.

Body: Polyamide (UL 94-V0).

Terminals & Contacts: Brass, Ag plated.

Options & information:

Set of 2 keys supply as standard

Single or double poles.

2 & 3 positions available.

Different kind of kyes—Optional.