



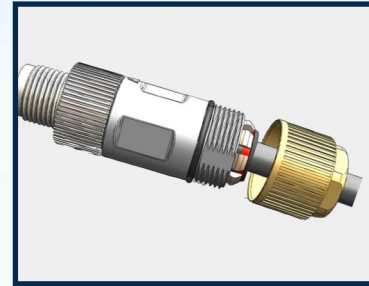

IP68 M12 IDC SCREWLESS CONNECTOR

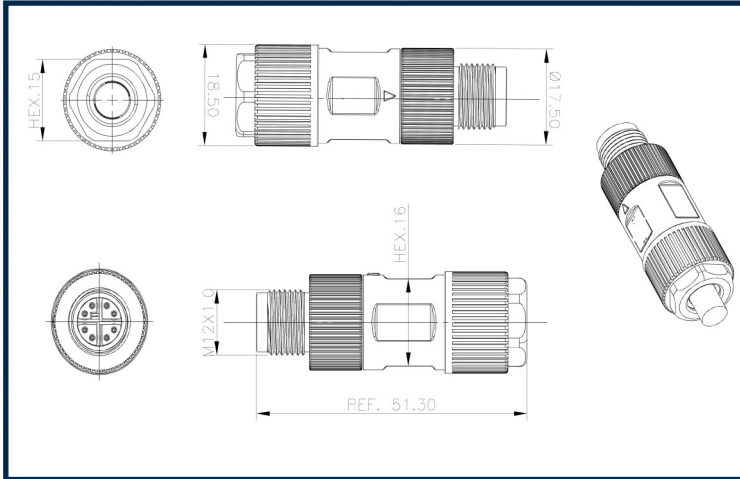

P/N: CBU-3550-S000

MECHANICAL SPECIFICATIONS:

Insulation-Displacement Contact mechanism.

Applicable wires: 22-26 AWG.

Applicable cables OD: 5.5-6 / 7.5-8.0mm.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -40/+85 °C

Water & Dust protection: IP-68

ELECTRICAL SPECIFICATIONS:

Data speed up to 10 Gb, Ethernet (CAT6A)

MATERIALS:

Housing: zinc alloy Nickel plated

Nut: brass Nickel plated.

Options & information:

Plastic housing is also available.