


WATERPROOF TOGGLE FOR 28VDC

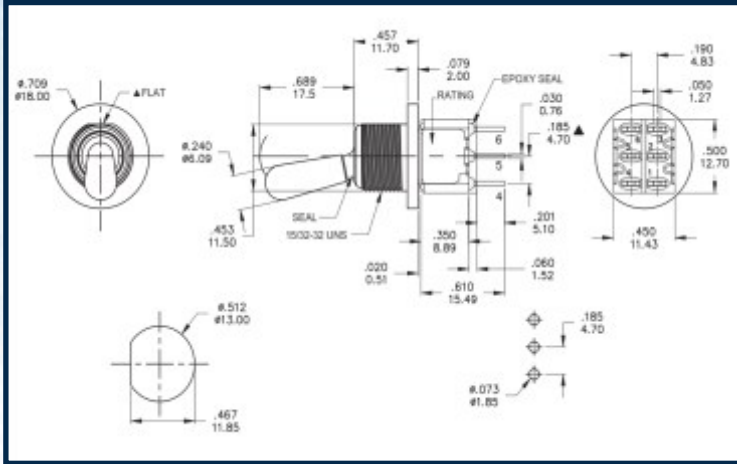

P/N: SGA-2640-S000

MECHANICAL SPECIFICATIONS:

D-Shape bushing (to eliminate rotation).

Terminals are sealed with Epoxy.

Operation cycles: 100,000.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -30/+85 °C

Water & Dust protection: IP67.

ELECTRICAL SPECIFICATIONS:

Contact form: 2 x Change Over

Maximum rating: 28VDC / 5A

Contact resistance: 100m Ohm.

Dielectric strength: 1,000V RMS 50HZ Min.

MATERIALS:

Bushing: Brass, nickel plated.

Case: DAP (UL94v-0).

Housing: Stainless Steel.

Terminals & Contacts: Brass, Silver plated.

Options & information:

Number of poles: 1 & 2

Electrical function options: On-On, On-Off-On, On-On-On (Maintained & Momentary).

Accessories: O-Ring + Nut (included).

Terminal options: Solder-lug (for wires) & Through-Hole (for pcb).