




VALVE CONNECTOR FIELD-ATTACHABLE

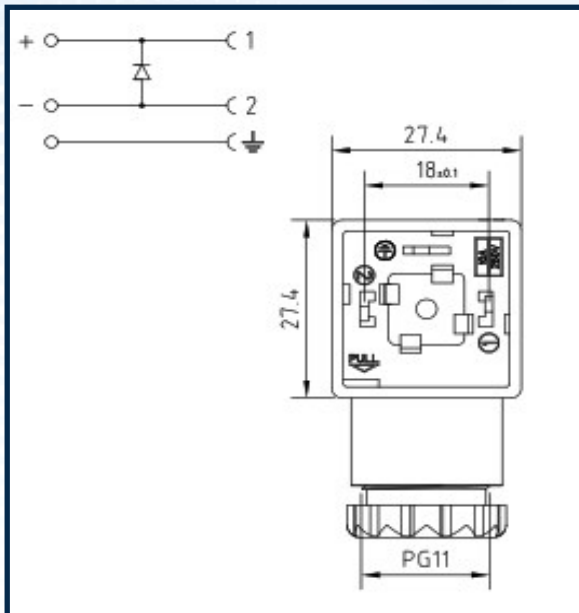

P/N: CDA-7675-S000

MECHANICAL SPECIFICATIONS:

EN175301-803, Form A.
 Complete with gasket and fixing screw.
 Housing height: 30mm.
 Terminals: Screw contacts.
 Suitable cable: 6-10mm

ELECTRICAL SPECIFICATIONS:

Electrical function: 2poles + P.E.
 Voltage: 230VDC
 Max. current rating: 16A
 Electronics: Diode 1A.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -40/+120 °C
 Water & Dust protection: IP65/67 (assembled).
 Flammability resistance : UL94-V2

MATERIALS:

Housing: PA66 UL94-V2.
 Internal core: PA66 UL94-V2.
 Terminals & Contacts: Brass Silver plated.
 Gasket: NBR.

Options & information:

UL & ATEX approvals—Optional.
 3poles + P.E.—Optional.
 Flat Silicone gasket—Optional.