



LIGHTED EMERGENCY WITH A BUZZER

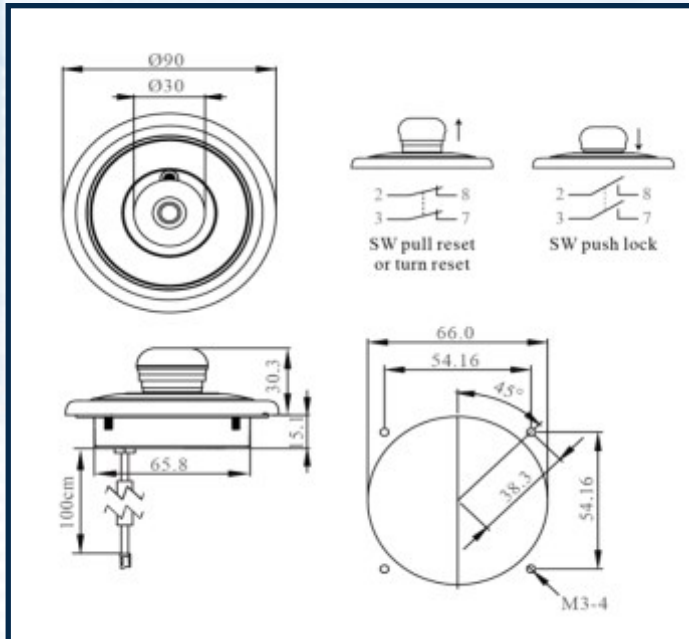

P/N: SPH-2245-S000

MECHANICAL SPECIFICATIONS:

Push to lock: 1,100gf.
Mechanical cycles: 100,000 cycles Min.
Total Travel: 4.5mm.
Screws for mounting: M3.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -25/+60 °C.
Water & Dust protection: IP65.

ELECTRICAL SPECIFICATIONS:

Contact form: 2XNC.
Maximum rating: 1A/30VDC.
LED: RGB.
Buzzer: 80db.

MATERIALS:

Housing: PC.
Cap: PC.
Contacts: Brass gold plated.

Options & information:

With or without buzzer.
Yellow guard—Optional.
8 wires cable with open tail—standard.
Connector assembly — Optional.