





3.20mm Height RF Spring probe

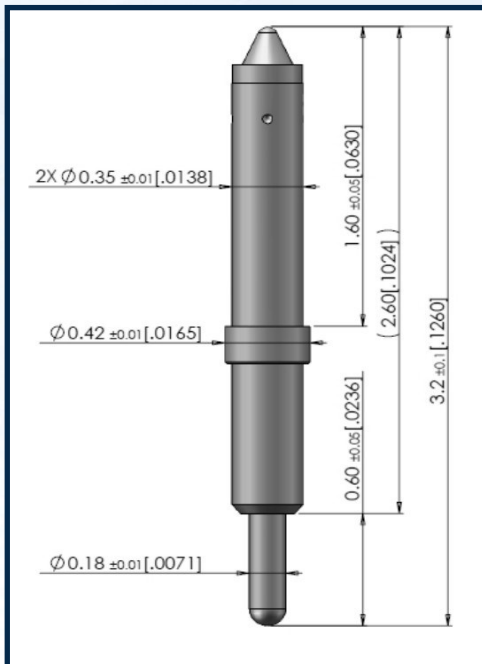

P/N: TDD-1721-S000

MECHANICAL SPECIFICATIONS:

Recommended travel: 0.40 mm

Contact force: 20 gf at full travel.

MATERIALS:

Plunger: BeCu.

Barrel: BeCu.

Spring: Music wire, Au plated.

ELECTRICAL SPECIFICATIONS:

Bandwidth : Up to 50GHz

resistance: <60 mOhm.

Current rating: 2.4A.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -40/+125 °C.

Options & information:

Different plunger shape.

Different length.

Customized socket for array of contacts.