


MPO CONNECTOR



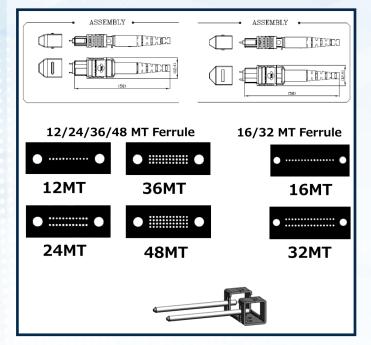

P/N: CHA-2565-S000

MECHANICAL SPECIFICATIONS:

Fiber counts: Up to 24F.

Life cycles: 500 matings.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -40/+75 ℃

OPTICAL SPECIFICATIONS:

Insertion loss:

Single mode: 0.35 or 0.7bd

Multi mode: 0.35 or 0.50db

KIT PARTS: Spring push Boot Housing Pin Clamp ↑ Dust cap Crimp ring (MT ferrules) Spring

Options & information: