


HALF PITCH DIP SWITCH

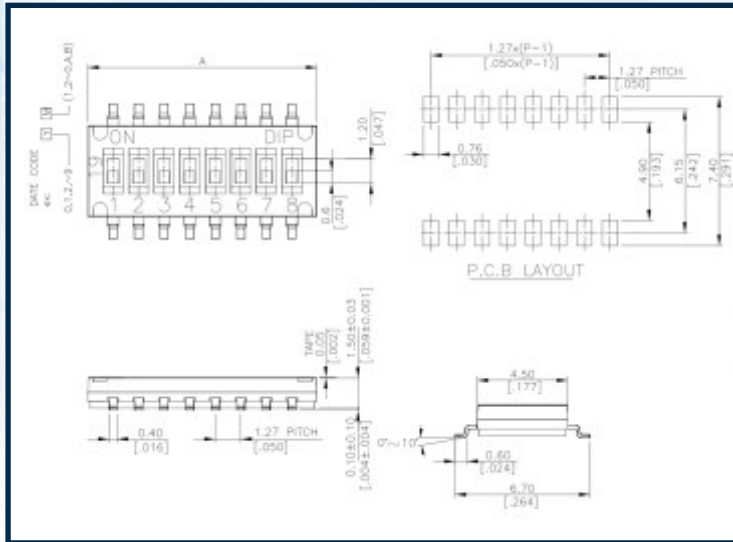

P/N: SUI-1480-S000

MECHANICAL SPECIFICATIONS:

Actuation force: 500 +/-50gf
 Travel: 0.6 +/-0.10mm
 Operation cycles: 1000 cycles min.
 H = 1.60mm

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -45/+80 °C

ELECTRICAL SPECIFICATIONS:

Contact form: 8 x Normally Open
 Maximum rating: 25mA/24VDC
 Contact resistance: 100m Ohm.
 Dielectric strength: 300VAC for 1 minute.

MATERIALS:

Base: Nylon Thermoplastic.
 Cover: Nylon Thermoplastic.
 Terminals: Brass Au plating.
 Contact: Alloy Copper, Gold plated.

Options & information:

2,4,6,8,10 Positions.
 Normally close contact form—Optional.
 Package: Tube or Reel.
 Reflow pick: > 255°C for 5 seconds.