
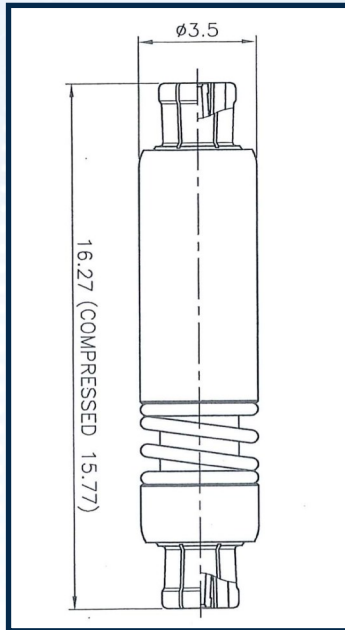


SMPM JACK TO JACK ADAPTOR**P/N: CMR-2521-S000****MECHANICAL SPECIFICATIONS:**

Mating force: 29N Max.

Contact retention: 7N Min.

Smooth force: 11N Max

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -40/+85 °C

ELECTRICAL SPECIFICATIONS:

Impedance: 50 Ω

Contact resistance: Outer- 2mΩ , Center-6mΩ

Voltage SWR: 1.4 Max.

Insertion loss: 0.5 Db Max..

MATERIALS:

Center contact: beryllium cooper 30μ" gold plating.

Insulator: Ultem 1000.

Outer contact: beryllium cooper, 5μ" gold plating.

Options & information:

Min axial force on the contact: 10 lbs.