


19MM FULLY-SEALED METAL PB

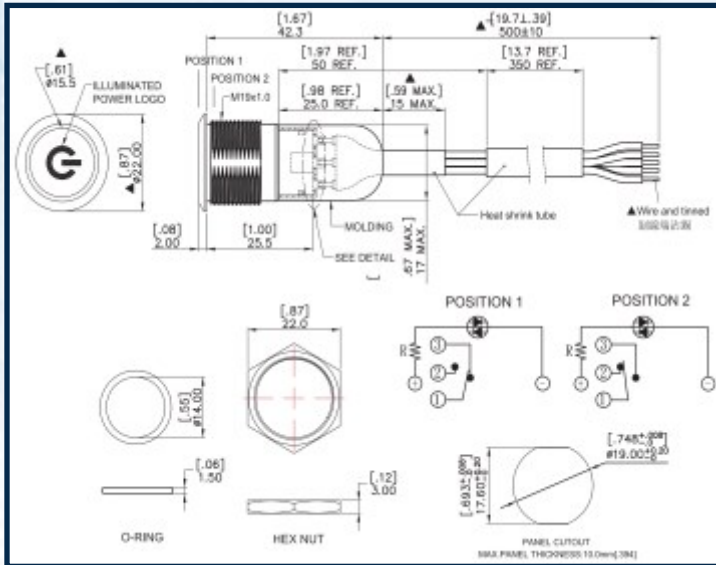

P/N: SFA-2381-S000

MECHANICAL SPECIFICATIONS:

Function: Alternate—Latch.

Mechanical cycles: 500,000 cycles Min.

Total plunger Travel: 3.2mm.

Torque: 5-14Nm

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -20/+55 °C.

Water & Dust protection: IP-67, IK-10.

ELECTRICAL SPECIFICATIONS:

Contact form: 1XChangeover.

Maximum rating: 5A/24VDC.

LED: Blue.

Contact resistance: 50m Ohm.

Dielectric strength: 2000V RMS

MATERIALS:

Housing: Stainless Steel.

Base: PBT UL94-V0

O-Ring: Silicon.

Contacts: Brass Silver plated.

Inner assembly: POM/PA66

Options & information:

Black chrome finish for bushing & actuator

Power logo

2 poles

Connector assembly

Colors: White, Blue, Green, Red, Yellow & Bicolor options. LED voltage: 3,6,12,24,36,110,220 volt.