


LOCK PUSH-PULL CONNECTOR

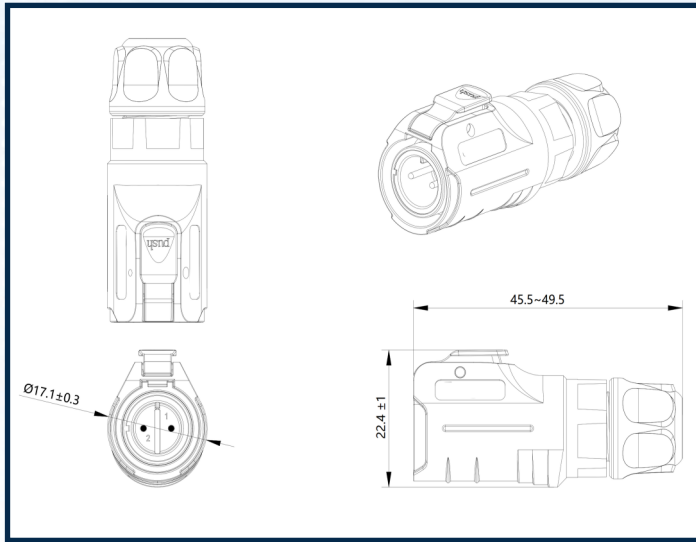

P/N: CJA-8540-S000

MECHANICAL SPECIFICATIONS:

Wires gauge: 20-22 AWG
Cable OD diameter: 3.5-4.5mm
Life cycle: 500 matings Min.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -25/+85 °C
Water & dust protection: IP-67

ELECTRICAL SPECIFICATIONS:

Rated current: 5A
Rated Voltage 12VDC
Insulation resistance: 500MΩ
Contact resistance: 5mΩ

MATERIALS:

Terminal: cooper Alloy, Gold plated.
O-Rings: Silicon.

Options & information:

Optional Wiring method: Soldering, Crimping Screwing Riveting.

Number of pins: 2-8

USB, HDMI & RJ45 internal connection are optional.

Widder temp. range is optional.