


MINIATURE HYDRAULIC-MAGNETIC MCB

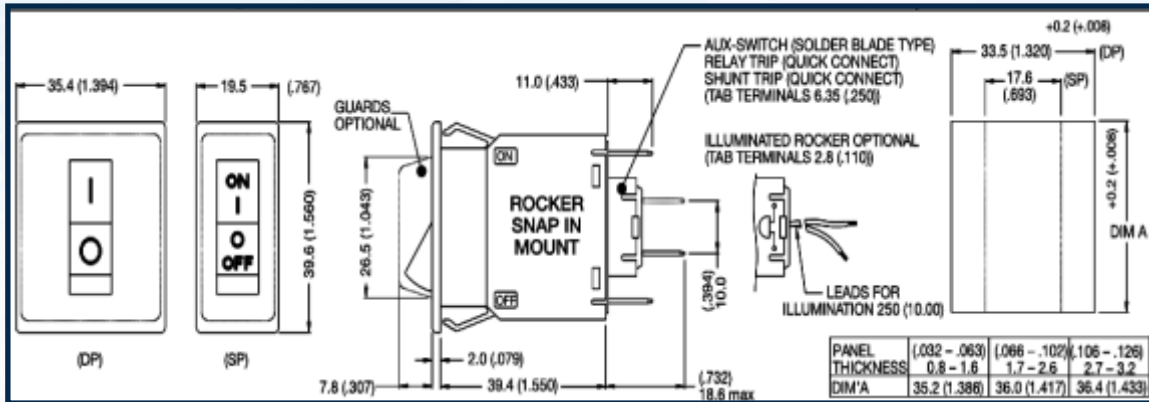

P/N: SXB-2510-S000

MECHANICAL SPECIFICATIONS:


- Snap-in mounting.
- Quick connect terminals.
- Silicon boot to prevent water & dust (optional).
- Housing: Polyamide UL94-V0.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -40/+85 °C.

ELECTRICAL SPECIFICATIONS:

- Single pole with trip.
- Rating: 5A/65VDC.
- Main Circuit Current Ratings: 20mA—30A.
- Interrupting Capacity: 1kA/240VAC, 0.6kA/80VDC.

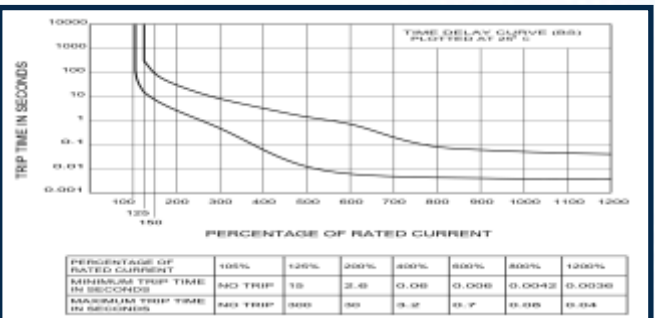

Options & information:

- Handles: Paddle, Baton, Illuminated Rocker, Push-to-Reset, Push-Pull.
- The rubber keys can be purchased separately.
- Auxiliary Switch—Optional.
- Terminals: quick connect, 45° bent screw terminal (M4 / 8-32), 90° bent quick connect terminal.
- Rating range: 0-30A