


RGB LIGHTED SMT TACT-SWITCH

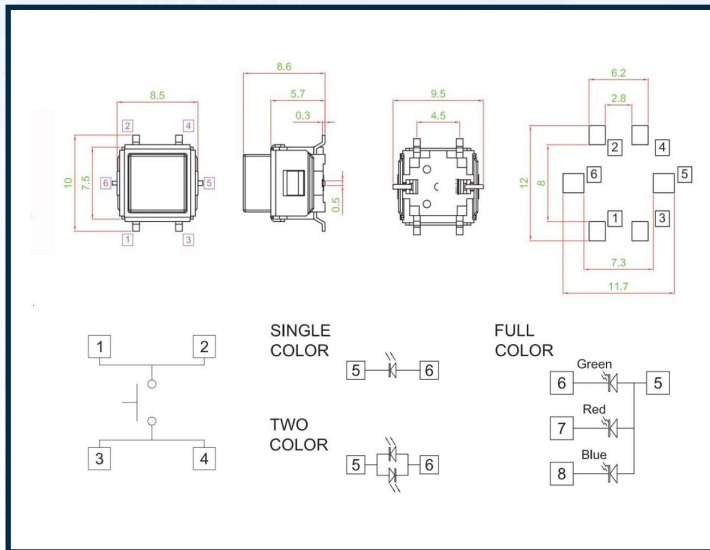

P/N: C0-2WN-BK-RGB

MECHANICAL SPECIFICATIONS:

Operating force: 300gf +/- 100

Travel: 0.4mm +/- 0.1

Operation cycles: 500,000 cycles min.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -45/+80 °C.

Water & dust protection: IP-67

ELECTRICAL SPECIFICATIONS:

Contact form: SPST.

Maximum rating: 12V / 50mA.

Contact resistance: 100m Ohm.

Dielectric strength: 500VAC for 1 minute.

Options & information:

LED colors: Blue, white, Green, Red, Yellow, Bicolor, RGB.

Terminal types: SMT or TH.