




## VALVE CONNECTOR FIELD-ATTACHABLE

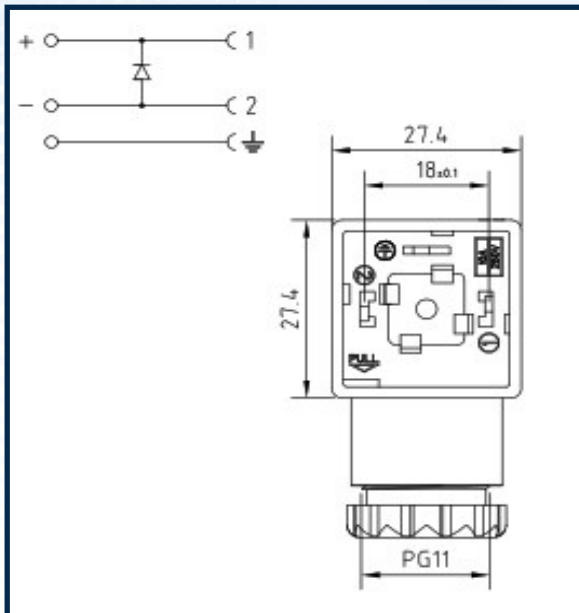

**P/N: G1N-U2D-03**

### MECHANICAL SPECIFICATIONS:

EN175301-803, Form A.  
 Complete with gasket and fixing screw.  
 Housing height: 30mm.  
 Terminals: Screw contacts.  
 Suitable cable: 6-10mm

### ELECTRICAL SPECIFICATIONS:

Electrical function: 2poles + P.E.  
 Voltage: 230VDC  
 Max. current rating: 16A  
 Electronics: Diode 1A.

### ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -40/+120 °C  
 Water & Dust protection: IP65/67 (assembled).  
 Flammability resistance : UL94-V2

### MATERIALS:

Housing: PA66 UL94-V2.  
 Internal core: PA66 UL94-V2.  
 Terminals & Contacts: Brass Silver plated.  
 Gasket: NBR.

### Options & information:

UL & ATEX approvals—Optional.  
 3poles + P.E.—Optional.  
 Flat Silicone gasket—Optional.