


MULTI MPO CONNECTOR IP67

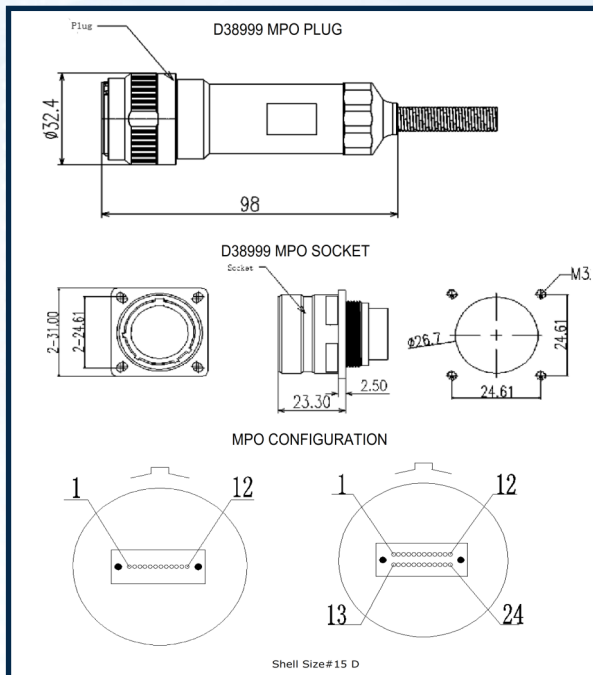

P/N: CHD-1324-S000

MECHANICAL SPECIFICATIONS:

Series design: D38999.

Shell no. 15

Index no. D

Cable OD: 7.0mm

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -40/+85 °C

Water & dust protection: IP-67

OPTICAL SPECIFICATIONS:

Insertion loss: $\leq 0.75\text{dB(SM)}$, $\leq 0.6\text{dB(MM)}$

Return Loss": SM $\geq 50\text{db}$

Ferrule: 8, 12 or 24C.

MATERIALS:

Metal parts: stainless steel.

Anti-push-unit: KEVLAR

Outer Sheath: TPU, LSZH or Hytrel.

Options & information:

Aluminum Alloy, Olive-green cadmium plating—Optional.