


5-WAY ILLUMINATED NAVIGATOR

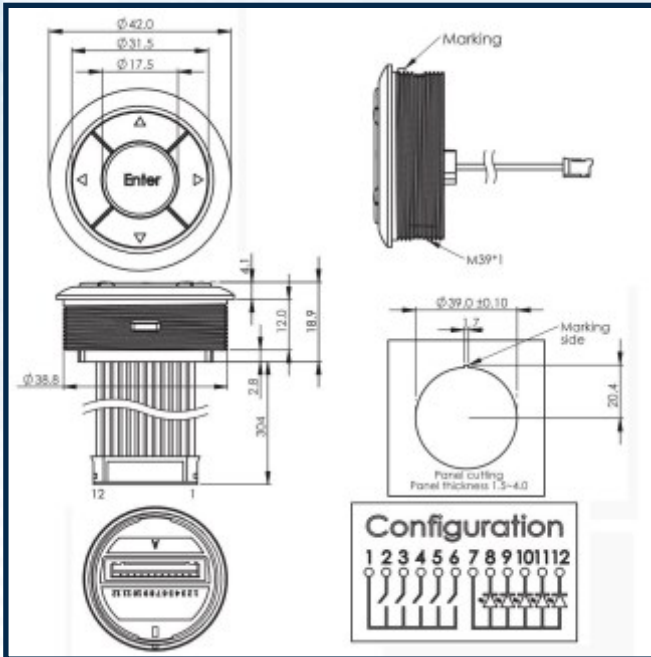

P/N: SFH-2340-S000

MECHANICAL SPECIFICATIONS:

Actuation force: 400gf +/- 100gf.

Travel: 0.50mm +/-0.30

Operation cycles: 200,000 cycles min.

Panel thickness: 1.5-4.00mm.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -25/+60 °C.

Water & Dust protection: IP-65.

ELECTRICAL SPECIFICATIONS:

Contact form: SP5T

Maximum rating: 50mA/12VDC

Contact resistance: 1.00 Ohm.

Dielectric strength: 250V AC (50-60 Hz) for 1 minute.

MATERIALS:

Housing: Aluminum.

Cap: PC.

Washer: NBR.

LED color: Yellow.

Options & information:

Relevant connector: JST SPH-002T-P0.5S or similar.

Metal nut & NBR washer are included.

Other led colors—Optional.

Special marking—Optional.