



## RF SIGNAL POGO CONTACTS

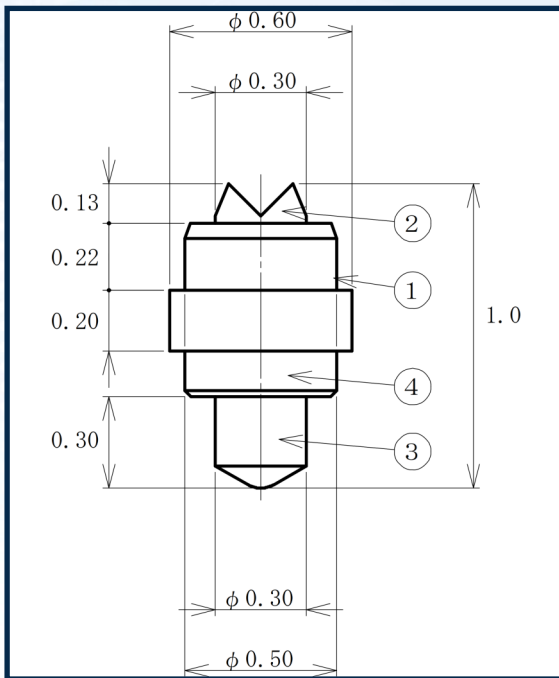

**P/N: TDP-2355-S000**

### MECHANICAL SPECIFICATIONS:

Operation Stroke: 0.20mm

Full Stroke: 0.25mm

Life cycle: 100,000.

### ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -25/+120 °C

### ELECTRICAL SPECIFICATIONS:

Bandwidth: 13.8Ghz (-1db)

Capacitance: 0.22pF

Rated current: 3A

Contact resistance: < 100mΩ

### MATERIALS:

Barrel: Bronze. Gold over Ni plating

Plunger: BeCu. Gold over Ni plating

Spring: Piano wire. Gold over Ni plating

### Options & information: