



WATERPROOF LC CONNECTOR

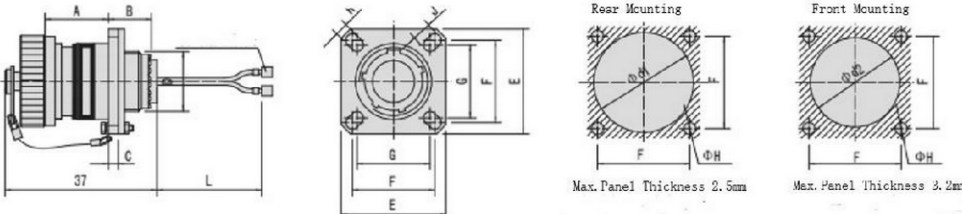


P/N: CHD-1480-SXXX

													
Shell Size	MS Size	A Max.	B Max.	C Max.	D Thread	E	F	G	H	J	d1 Min.	d2 Min.	
9	A	20.9	10.6	2.5	M12X1-6g	23.8	18.3	15.1	3.3	5.5	16.7	13.1	
11	B	20.9	10.6	2.5	M15X1-6g	26.2	20.6	18.3	3.3	4.9	20.2	15.9	
13	C	20.9	10.6	2.5	M18X1-6g	28.6	23.0	20.6	3.3	4.9	23.4	19.1	
15	D	20.9	10.6	2.5	M22X1-6g	31.0	24.6	23.00	3.3	4.9	26.6	23.0	
17	E	20.9	10.6	2.5	M25X1-6g	33.3	27.0	24.6	3.3	4.9	31.0	25.8	
19	F	20.9	10.6	2.5	M28X1-6g	36.5	29.4	27.0	3.3	4.9	32.9	29	
21	G	20.1	11.4	3.2	M31X1-6g	39.7	31.8	29.4	3.3	4.9	36.1	32.2	
23	H	20.1	11.4	3.2	M34X1-6g	42.9	34.9	31.8	3.9	6.2	39.3	34.9	
25	J	20.1	11.4	3.2	M37X1-6g	46.0	38.1	34.9	3.9	6.2	42.5	37.7	



P/N: CHD-1482-SXXX

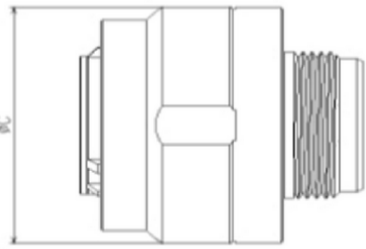	Shell Size	MS Size	C
	9	A	21.80
	11	B	25.00
	13	C	29.40
	15	D	32.40
	17	E	35.60
	19	F	38.50
	23	H	44.90
	25	J	48.00

MECHANICAL SPECIFICATIONS:

Series design: D38999.

Mating cycle: > 500

Material: stainless steel.

1-32 fiber connections.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -55/+85 °C

Water & dust protection: IP-67

Options & information:

Aluminum Alloy, Olive-green cadmium plating—Optional.