


16MM METAL WATERPROOF PB

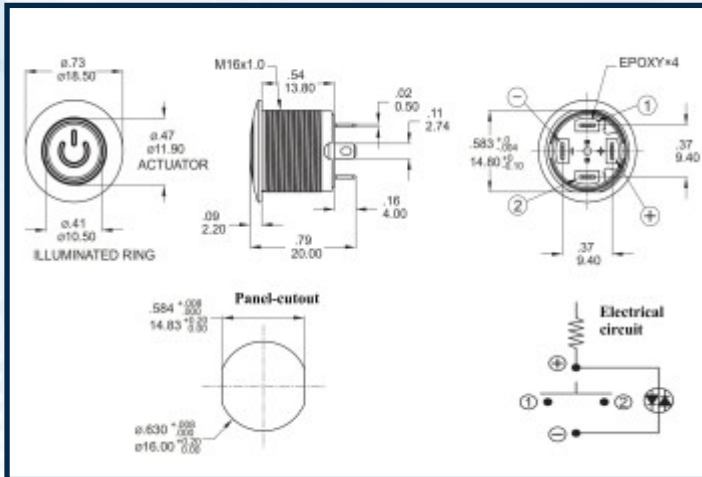

P/N: SFA-2391-S000

MECHANICAL SPECIFICATIONS:

Travel: 2.0 mm.

Operating cycles: 200,000 cycles min at full load.

Torque: 11.5 kgf/cm.

Operation type: Momentary.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -25/+70 °C.

Water & Dust protection: IP-67.

ELECTRICAL SPECIFICATIONS:

Contact form: N.O

Maximum rating: 2A / 36VDC.

Contact resistance: 50m Ohm or less.

Dielectric strength: 2,000 VAC rms.

Led light: Green

MATERIALS:

Housing: aluminum alloy/Stainless steel.

Base material: PBT.

Terminals: Brass ,Gold flash plated.

Contacts: Silver alloy

Options & information:

Customized harness

Other LED colors, include RGB

Other LED voltage.

Flat or raised actuator

Latch operation