


PUSH-PULL METAL SWITCH

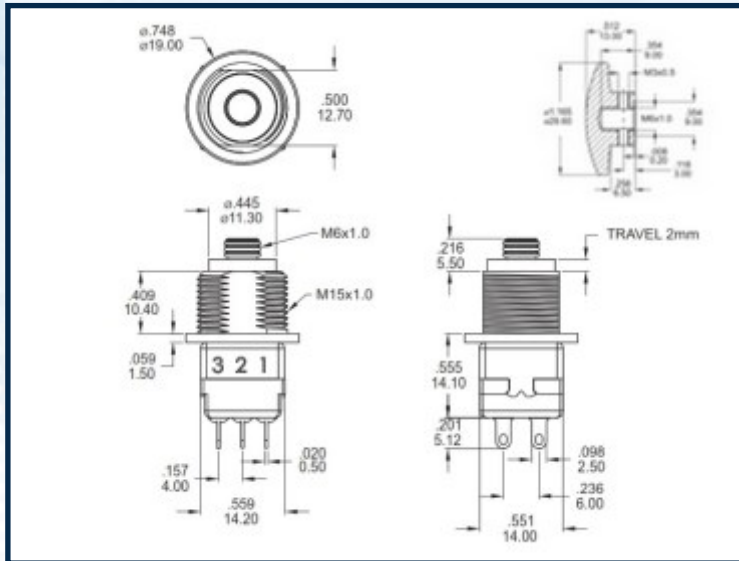

P/N: SFA-2311-S025

MECHANICAL SPECIFICATIONS:

Push & Pull force: 2000gf

Stroke: 2.00mm

Operation cycles: 100,000 cycles Min.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -40/+85 °C

Water & Dust protection: IP65

ELECTRICAL SPECIFICATIONS:

Contact form: 2 x Change Over

Maximum rating: 4A/24VDC.

Contact resistance: 10m Ohm.

Dielectric strength: 1,000V RMS 50HZ Min.

MATERIALS:

Bushing: Brass, Nickel plated.

Case: Diallyl phthalate (UL94v-0).

Housing: Stainless Steel.

Terminals & Contacts: Brass, Silver plated.

Options & information:

Different cap colors.

Flying leads.

Tray package.